
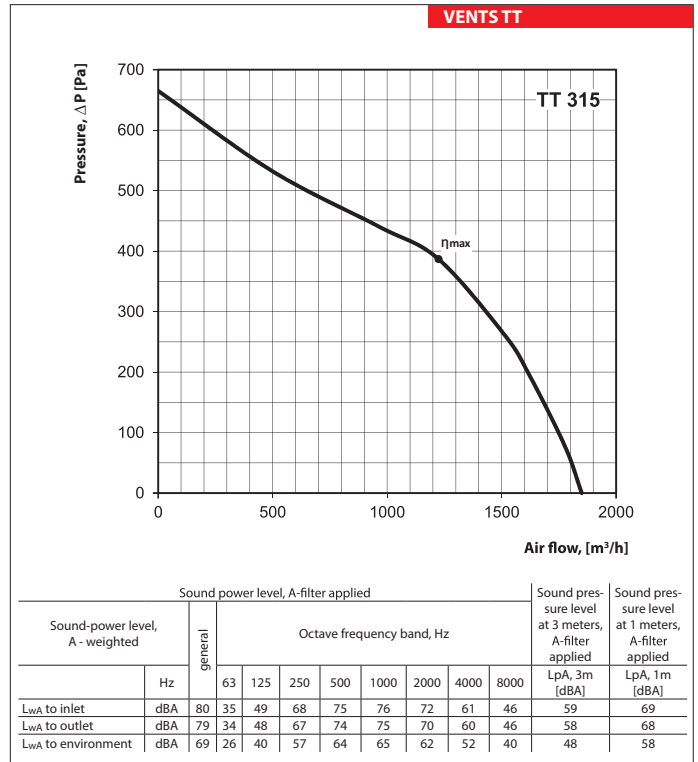


Technical data


	TT 100		TT 125		TT 125 S	
Speed	min	max	min	max	min	max
Voltage [V/50 (60) Hz]	1~ 230		1~ 230		1~ 230	
Power [W]	21	33	23	37	28	54
Current [A]	0.11	0.21	0.18	0.27	0.12	0.16
Max. air flow [m³/h]	145	187	220	280	240	320
RPM [min ⁻¹]	2180	2385	1950	2455	1850	2510
Noise level at 3 m [dBA]	27	36	28	37	31	42
Max. transported air temperature [°C]	60		60		60	
SEC class	C		B		C	
Protection rating	IPX4		IPX4		IPX4	

	TT 150 / TT 160		TT 250	TT 315
Speed	min	max	-	-
Voltage [V/50 (60) Hz]	1~ 230		1~ 230	1~ 230
Power [W]	30	60	120	314
Current [A]	0.17	0.27	0.52	1.42
Max. air flow [m³/h]	405	520	950	1850
RPM [min ⁻¹]	1680	2460	1840	2335
Noise level at 3 m [dBA]	33	44	45	48
Max. transported air temperature [°C]	60		60	60
SEC class	B		B	-
Protection rating	IPX4		IPX4	IPX4

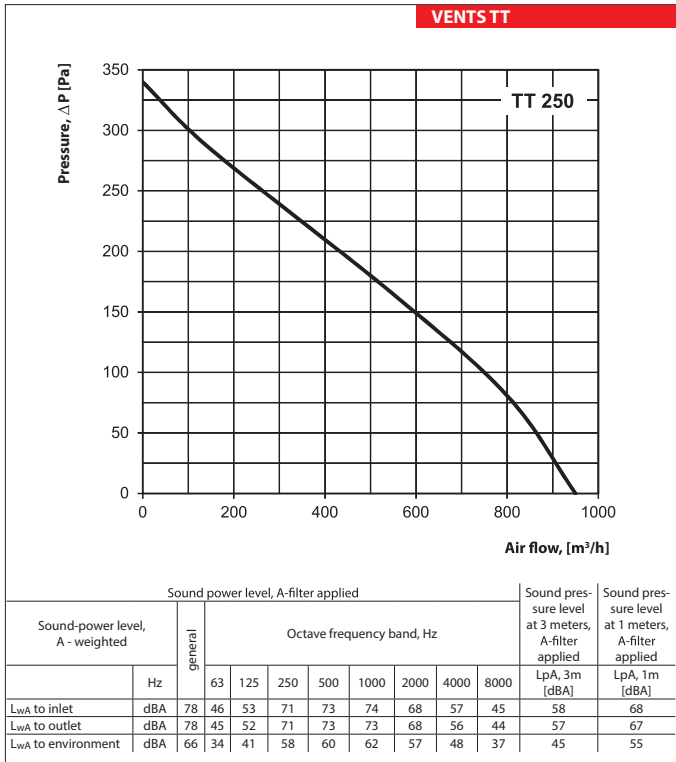

Fan overall dimensions

Type	Dimensions [mm]				Weight [kg]
	∅D	B	H	L	
TT 100	96	167	190	246	1.45
TT 125	123	167	190	246	1.35
TT 125 S	123	223	250	295	3.14
TT 150	146	223	250	295	2.65
TT 160	158	233	250	295	2.65
TT 250	247	287	323	383	6.9
TT 315	310	362	408	445	10.35

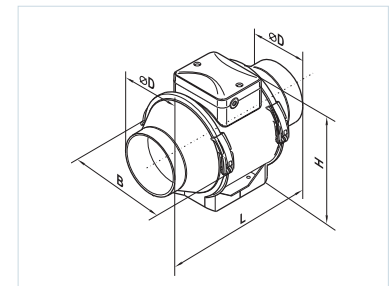

η _v [%]	MC	EC	N	VSD	[kW]	[A]	[m³/h]	[Pa]	[RPM]	SR
41.7	A	Static	57.4	No	0.310	1.43	1224	387	2350	1